

MTBE Treatment Using Modified Fenton's Reagent



Amanda Struse, P.E. (astruse@ch2m.com) (CH2M HILL, Atlanta, GA)
 Modupe Babalola, P.E. (National Guard Bureau, Andrews AFB, Maryland)
 West Johnson (CH2M HILL, Atlanta, GA)
 Dr. John Haselow (Redox Tech, Morrisville, NC)









ABSTRACT

Modified Fenton's reagent was applied for in situ treatment of an aquifer in Jacksonville, Florida where the primary contaminant is methyl-tertiary-butyl ether (MTBE). MTBE was measured in groundwater up to 250 µg/L. MTBE is present in a shallow aquifer (between 10 and 30 feet below ground surface) that consists of a silty, clayey sand. The MTBE plume is under a fueling center parking lot and adjacent building that are still extensively used by the facility. The goal of the remedial action is to attain site closure within three years while minimizing disturbances to facility operations.

CH2M HILL selected in situ chemical oxidation (ISCO) as the most appropriate treatment technology for the site due to the short period of performance and the infeasibility of closing the parking lot for an extended duration. Of the oxidants commonly used for ISCO, hydrogen peroxide (modified Fenton's Reagent) and sodium persulfate were the only feasible alternatives to treat the MTBE, benzene, ethyl benzene, and xylenes. Ozone was not selected because it is difficult to distribute in the subsurface and permanganate is ineffective in the oxidation of MTBE. During project planning, the State of Florida imposed stringent secondary drinking standards for both sulfate and iron. Because sulfate is a by-product of the degradation of persulfate, this treatment method was eliminated as an alternative. Also, the secondary standard for iron precluded the addition of iron to stimulate Fenton's chemistry. However, previous groundwater analytical results indicated high iron content in the aquifer, implying that a modified Fenton's application could work using the naturally occurring iron.

Prior to the ISCO application, CH2M HILL completed a bench scale test to assess the longevity of 12% H₂O₂ solution in slurries comprised of site soil and distilled water. The pH of the test slurries was maintained near 7 throughout the test. The results of the bench scale test indicated a peroxide half-life of about 48 hours. The field injection design called for 12% solution injected in 3 foot intervals over the vertical span of the aquifer.

The initial two-week ISCO injection was completed in September 2005. During the field activities, difficulties were encountered during chemical injection due to the high iron content in groundwater and the H₂O₂ injection concentration, resulting in rapid degradation of H₂O₂ (producing oxygen and hydrogen gas) and development of significant backpressure in the subsurface. However, 20,000 pounds H₂O₂ were introduced to the subsurface and groundwater monitoring 30 days after the injection showed a 96% decrease in the MTBE concentration at the most contaminated well. Some rebound in the MTBE concentration has been observed at this well, however approximately three months after the ISCO injection, the MTBE concentration (27.6 µg/L) was still only 11% of the baseline concentration (250 µg/L). This concentration is only slightly above the treatment standard for site closure (20 µg/L).

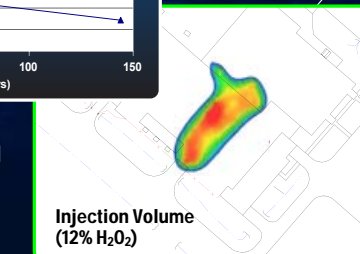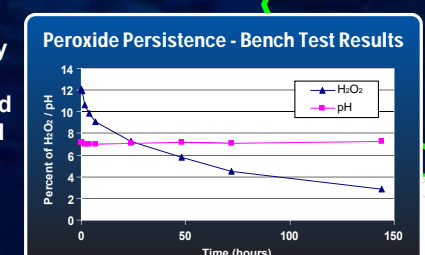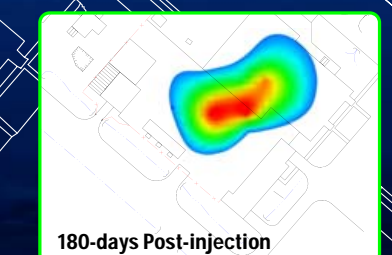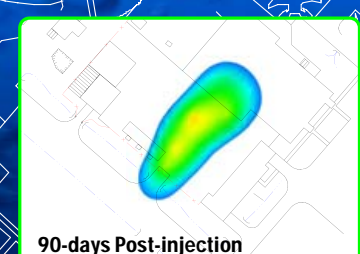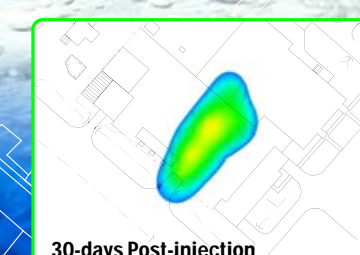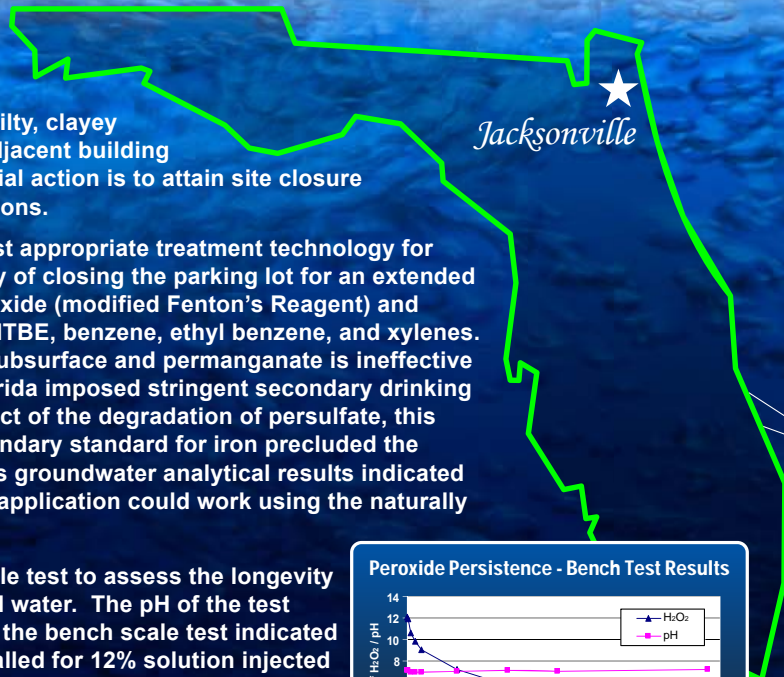

- ### Lessons Learned/Path Forward
- > H₂O₂ reactivity with groundwater greater than observed in bench study
 - > March 2006 data indicates MTBE mass under building greater than anticipated
 - > Second H₂O₂ injection scheduled to begin July 10 and will be focused in source area
 - > Additional injection points will be placed in source area

